



# SERIE E-3000 Ø25.4, Ø25 mm

## Modular Type ø1.0", ø0.98"(ø25.4, ø25 mm) System Chart

\*Take note that product names and specifications will be changed.

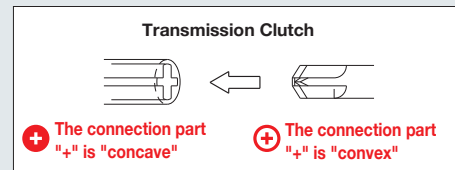

Spindle NR-H2551  
Spindle NR-2551  
[Page 2-p23](#)



\* May be connected between the motor and the spindle as required for increased torque.

Brushless Motor EM25N-5000-J4  
[Page 2-p22](#)



Compressor



\*Clean dry air is required.



120V



\* Only one motor can be operated at a time. No simultaneous operation.

\* Do not exceed the maximum motor speed recommendation for the spindles. Excess speed will dramatically reduce bearing life.